GNS CERAMICS
EXCLUSIVELY WHOLESALE

BELLA VITA




Create a stylish new look in your kitchen, bathroom or en suite with the introduction of these Bella Vita subways. Available in eleven colours, these mini brick shaped tiles have a bevelled edge with a gloss finish. Perfect for creating a stunning splash back or feature wall.




BELLA VITA

82x257mm



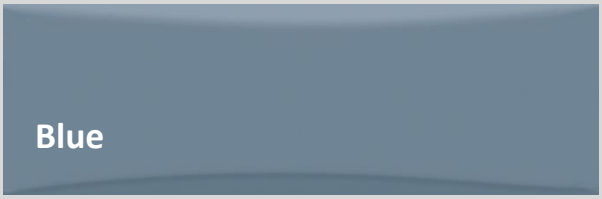





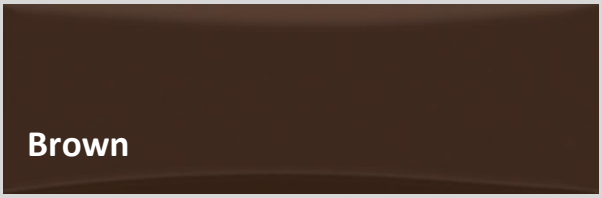







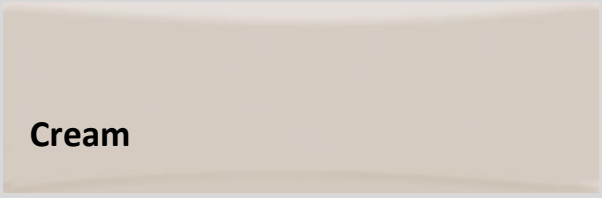

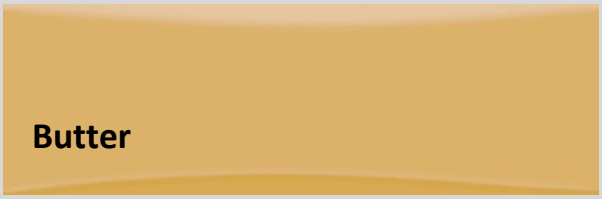




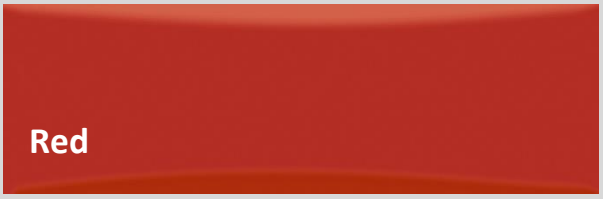

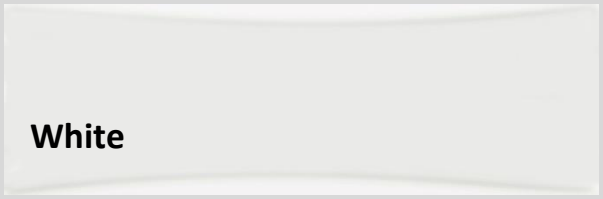

White available in gloss and satin.









GNS Ceramics recommends that our retail shops pass on the following information to the installer and end-user.

Click or Scan for Installation Instructions


Ceramic tiles are only one component of a much larger building system. It is our experience that failure of any tiling system is very often the result of a combination of factors. For example; inappropriate design, type of substrate, surface preparation, temperature during installation, adhesives, incompatibility of products, product failure, environmental factors skill and knowledge of the installers etc; the latter being supplied or controlled by a variety of manufacturers and tradesmen. GNS Ceramics has no involvement in the design, selling and installation processes and once goods have been dispatched from our warehouse we have no control over where and how these products are used. As a result the project manager, and or the tiler are the only people in a position to ensure that all the components used in a project are compatible and that the product is installed in accordance with the Australian Building Code and the Australian Standards.

Installation Instructions for all types of tiles can be found in the GNS Ceramics Price List, and on our website. We suggest these are followed at all times.

Cleaning and Maintenance

Do not use abrasive cleaners and chemicals which could permanently scratch and damage the surface of the tile. For daily cleaning we recommend the use of a mild PH Neutral detergent. Should a more vigorous cleaning programme be required we recommend the use of a proprietary tile cleaner from a specialty tile supplier.

Colour & Pattern Variation Guide

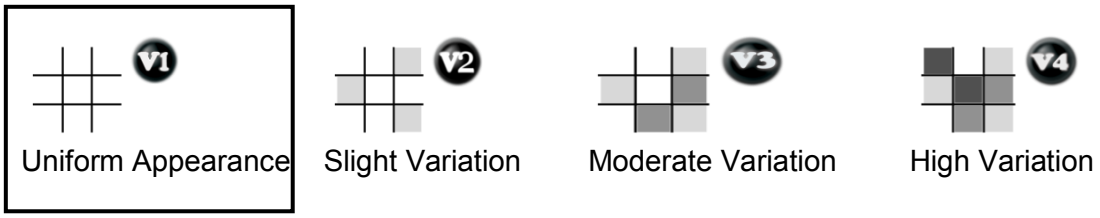

Classes of Use

The classification has taken into account the recommendations of the Australian Standards; however, they are given for general guidance only. They are valid for the given application under **NORMAL CONDITIONS** and should not be taken to provide accurate product specifications for specific requirements.
WARNING: Other standards and building code requirements may affect your selection of tiles.
Consideration should be given to the footwear, type of pedestrian traffic and cleaning methods expected. Floors should be adequately protected against soiling from following trades during installation; they should also be protected against scratching dirt at the entrances to building by interposing footwear cleaning devices. For example, mats, shoe scrapers, static devices, etc.

CLASS 0 - Tiles in this class are not recommended for use on floors.

Certificate of Technical Specifications

PRODUCT:	BELLA VITA WH LUX BOLD	FORMAT:	8X25	NOMINAL DIMENSION:	8.2X25.9	Review:	4
MANUFACTURING DIMENSION:	82.4 X 257.5mm X 7.4 mm	CONTAINS:	25 Pecas 0,53 m2 5,7 SQFT	GROUP:	BIII		

Technical Characteristics	ISO	Req.	Unit	Specification
DIM. VAR. IN REL. W. OF THE GREATER SIDE	10545-2	+/-0.50	%	+/-0.50
DIM. VAR. IN REL. W. OF THE MINOR SIDE	10545-2	+/-0.50	%	+/-0.50
DIM. VAR. IN REL. AVERAGE OF THE MINOR SIDE	10545-2	+/-0.30	%	+/-0.30
DIM. VAR. IN REL. AVERAGE OF THE GREATER SIDE	10545-2	+/-0.30	%	+/-0.30
THICKNESS VARIATION	10545-2	+/-10.0	%	+/-10.0
STRAIGHTNESS OF THE GREATER SIDE	10545-2	+/-0.30	%	+/-0.30
STRAIGHTNESS OF THE MINOR SIDE	10545-2	+/-0.30	%	+/-0.30
DEVIATION FROM ORTHOGONALITY OF THE GREATER SIDE	10545-2	+/-0.50	%	+/-0.50
DEVIATION FROM ORTHOGONALITY OF THE MINOR SIDE	10545-2	+/-0.50	%	+/-0.50
CENTRAL DIAGONAL CURVATURE DEVIATION	10545-2	+0.50/-0.30	%	+0.50/-0.30
DEVIATION OF THE CURVATURE OF THE SIDES	10545-2	N.A.	%	N.A.
DEVIATION OF THE CURVATURE OF THE SIDES	10545-2	N.A.	%	N.A.
BENDING OVER DIAGONAL	10545-2	+/-0.50	%	+/-0.50
QUALITY OF SURFACE	10545-2	>=95	%	>=95
WATER ABSORPTION	10545-3	> 10	%	> 10
RESISTANCE TO BENDING	10545-4	>=12	N/mm2	>=13
BREAKING STRENGTH	10545-4	>=200	N	>=300
CLASS OF USE *	10545-7	Especificar	PEI	0
THERMAL SHOCK RESISTANCE	10545-9	-	-	OK
LINEAR EXPANSION COEFFICIENT X 10-6	10545-8	-	C-1	5.8 a 7.0
MOISTURE EXPANSION	10545-10	-	mm/m	<=0.6
GRAZING RESISTANCE	10545-11	Requerida	-	OK
RESISTANCE TO CHEMICALS	10545-13	Min.Classe GB	-	GA
RESISTANCE ATTACKS ACID/ALKALINE	10545-13	Especificar	-	GLB
SURFACE RESISTANCE TO STAINS	10545-14	Min.Classe 3	-	Min.Classe 3
COEFFICIENT OF FRICTION WET	NBR13818	Especificar		-
COEFFICIENT WET	ASTM1028	Especificar		-
CHANGES IN HUE				V1

Reaction to fire evaluation (NBR15575): Class I (non-combustible)
PEI 0 - Use in walls.



23/05/19
Rodrigo Pereira Guedin
Industrial Director

PORTINARI
AMBIENTES COM EMOÇÃO