

Casoli


The Casoli series, from Prissmacer, Spain, is a collection of 3 contemporary colours with a hand-made feel. The soft undulations and glossy finish add light and warmth, while the subtle variations from piece to piece ensure every installation is unique.

GNS CERAMICS
EXCLUSIVELY WHOLESALE

Casoli

223x223 mm

Vintage White

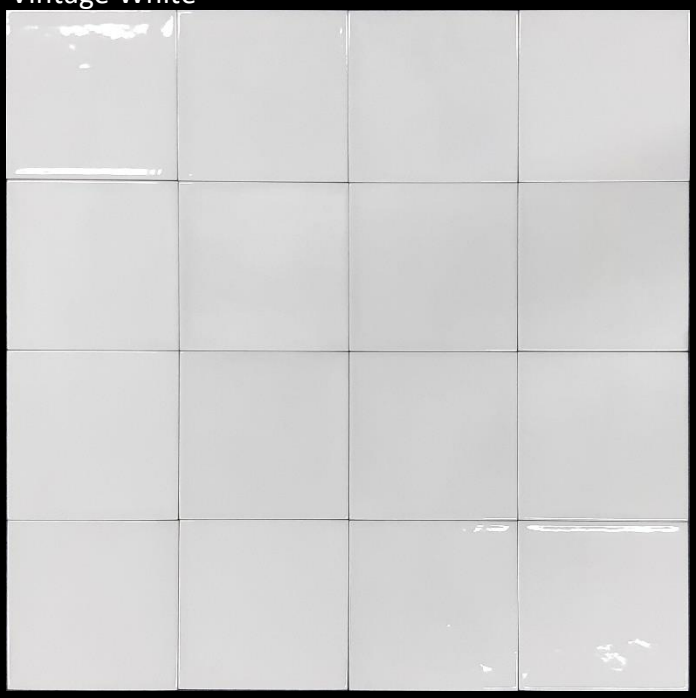

Green



Coral



Made in Spain | Glazed Porcelain | Gloss Finish | Cushioned Edge | V2 Variation | Floor Cat. 3

GNS Ceramics recommends that our retail shops pass on the following information to the installer and end-user.

Click or Scan for Installation Instructions


Ceramic tiles are only one component of a much larger building system. It is our experience that failure of any tiling system is very often the result of a combination of factors. For example; inappropriate design, type of substrate, surface preparation, temperature during installation, adhesives, incompatibility of products, product failure, environmental factors skill and knowledge of the installers etc; the latter being supplied or controlled by a variety of manufacturers and tradesmen. GNS Ceramics has no involvement in the design, selling and installation processes and once goods have been dispatched from our warehouse we have no control over where and how these products are used. As a result the project manager, and or the tiler are the only people in a position to ensure that all the components used in a project are compatible and that the product is installed in accordance with the Australian Building Code and the Australian Standards.

Installation Instructions for all types of tiles can be found in the GNS Ceramics Price List, and on our website. We suggest these are followed at all times.

Cleaning and Maintenance

Do not use abrasive cleaners and chemicals which could permanently scratch and damage the surface of the tile. For daily cleaning we recommend the use of a mild PH Neutral detergent. Should a more vigorous cleaning programme be required we recommend the use of a proprietary tile cleaner from a specialty tile supplier.

Colour & Pattern Variation Guide

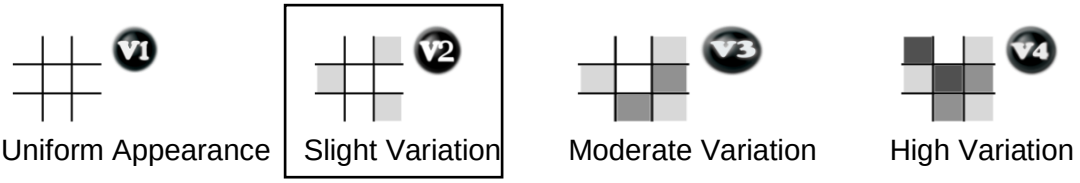

Uniform Appearance | Slight Variation | Moderate Variation | High Variation

Classes of Use

The classification has taken into account the recommendations of the Australian Standards; however, they are given for general guidance only. They are valid for the given application under **NORMAL CONDITIONS** and should not be taken to provide accurate product specifications for specific requirements.
WARNING: Other standards and building code requirements may affect your selection of tiles.
Consideration should be given to the footwear, type of pedestrian traffic and cleaning methods expected. Floors should be adequately protected against soiling from following trades during installation; they should also be protected against scratching dirt at the entrances to building by interposing footwear cleaning devices. For example, mats, shoe scrapers, static devices, etc.

CLASS 3 - Floor coverings in areas that, with normal footwear, are walked on more often with small amounts of scratching dirt; for example, living areas, bedrooms, residential kitchens, laundries with internal access, halls and corridors. This does not apply to abnormal footwear; i.e. work boots and outdoor shoes.

prismacer

CARACTERÍSTICAS TÉCNICAS

MODELO:	**PRIS.CASOLI**
FORMATO:	**22,3 x 22,3**
PRODUCTO:	**GRES ESMALTADO**
GRUPO:	**B Ib**

FECHA: 10/03/2020

ENSAYOS	RESULTADOS	
UNE-EN ISO 10545-2 DIMENSIONES Y ASPECTO SUPERFICIAL	MEDIDAS (%)	**CUMPLE CON LA NORMA**
UNE-EN ISO 10545-3 ABSORCIÓN DE AGUA	VALOR MEDIO (%)	**0,5 % - 3 %**
UNE-EN-ISO 10545-4 RESISTENCIA A LA FLEXIÓN	FUERZA DE ROTURA (N)	**1600 - 2400 N**
	RESISTENCIA A LA FLEXIÓN (N/mm²)	**35 - 45 N/mm²**
UNE-EN ISO 10545-9 RESISTENCIA AL CHOQUE TÉRMICO	RESULTADO	**RESISTE**
UNE-EN ISO 10545-11 RESISTENCIA AL CUARTEO	RESULTADO	**RESISTE**
UNE-EN ISO 10545-13 RESISTENCIA QUÍMICA	CLORURO AMÓNICO 100 g/l	**A**
	HIPOCLORITO SÓDICO 20 mg/l	**A**
	ÁCIDO CLORHÍDRICO 3 % ÁCIDO CITRÍCO 100 g/l HIDRÓXIDO POTÁSICO 30 g/l	**CUMPLE CON LA NORMA**
UNE-EN ISO 10545-14 RESISTENCIA A LAS MANCHAS	ÓXIDO VERDE EN ACEITE LIGERO	**5**
	SOLUCIÓN ALCOHÓLICA DE YODO	**5**
	ACEITE DE OLIVA	**5**

OBSERVACIONES:	Vº Bº LABORATORIO:
	 AZULEJOS FOSET, SLU, Camino del Palmeral, 10 12200 ONDA (Castellón) ESPAÑA