GNS CERAMICS
EXCLUSIVELY WHOLESALE


Crete

A soft and subtle natural stone inspired collection, the Crete series provides a gentle movement that creates a refined style to any design and can work effortlessly across a wide variety of tastes. The special In&Out finish allows the Crete series to flow from inside to out, creating a seamless transition between your indoor and outdoor spaces.






Crete

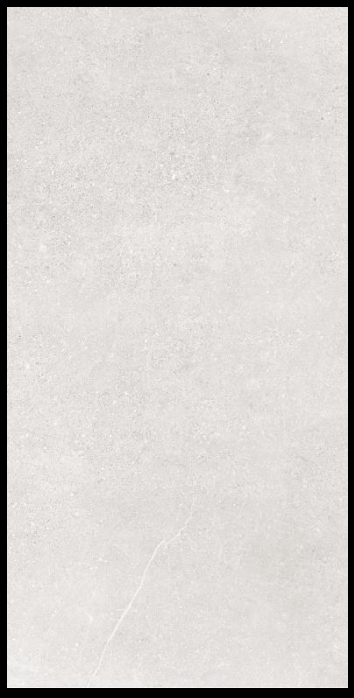
Bianco White


Warm Beige


Pearl Grey

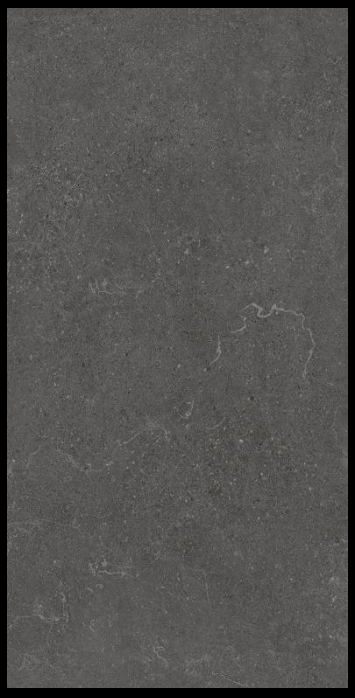
Nero Black

600x1200mm

600x600mm

75x300mm

300x600mm

Glazed Technical Porcelain

Rectified Edge

V2 Variation

INOUT SURFACE

P4

Floor Cat. 4

GNS Ceramics recommends that our retail shops pass on the following information to the installer and end-user.

Click or Scan for Installation Instructions


Ceramic tiles are only one component of a much larger building system. It is our experience that failure of any tiling system is very often the result of a combination of factors. For example; inappropriate design, type of substrate, surface preparation, temperature during installation, adhesives, incompatibility of products, product failure, environmental factors skill and knowledge of the installers etc; the latter being supplied or controlled by a variety of manufacturers and tradesmen. GNS Ceramics has no involvement in the design, selling and installation processes and once goods have been dispatched from our warehouse we have no control over where and how these products are used. As a result the project manager, and or the tiler are the only people in a position to ensure that all the components used in a project are compatible and that the product is installed in accordance with the Australian Building Code and the Australian Standards.

Installation Instructions for all types of tiles can be found in the GNS Ceramics Price List, and on our website. We suggest these are followed at all times.

Cleaning and Maintenance

Do not use abrasive cleaners and chemicals which could permanently scratch and damage the surface of the tile. For daily cleaning we recommend the use of a mild PH Neutral detergent. Should a more vigorous cleaning programme be required we recommend the use of a proprietary tile cleaner from a specialty tile supplier.

Colour & Pattern Variation Guide

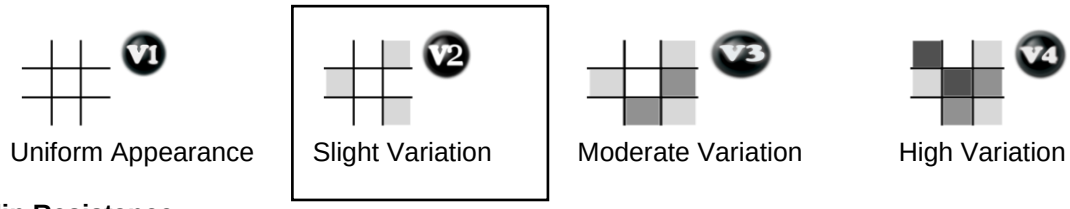

Uniform Appearance | Slight Variation | Moderate Variation | High Variation

Slip Resistance

The best way to minimise the risk of slipping is through safe design principals. This involves a risk management approach which evaluates the likelihood and consequence of an incident to occur. Slip resistive flooring is only one of the design components to consider, other design features should also be considered, including awnings, airlocks, matting and a suitable cleaning regime to reduce the extent of contaminates. Visual aids, warning signs, handrails and lighting, along with the footwear to be worn, should also be considered.

All ceramic tiles can be slippery, particularly when wet. This includes tiles, commonly used in wet areas such as bathrooms. It is important that customers be aware of the potential danger of wet ceramic tiles and seek advice from the retailer as to the level of slip-resistance of any particular tile, and its suitability for the intended application. If there is any doubt, tiles should be tested for slip-resistance immediately after being laid, under the conditions that they will be subject to during use. While tiles may achieve an acceptable standard in a laboratory test, it is quite probable that the performance in-situ will be less than expected, due to installation methods, wear & tear, cleaning regimes and unforeseen circumstances. Test results should therefore to be seen as a relative guide to estimate the merits of one tile versus another and should be used in conjunction with the Australian Building Code and the relevant Australian Standards. Further information on slip resistance is provided in the Australian Standards HB198:2014 - An Introductory guide to the slip resistance of pedestrian surface materials.

There are many factors beyond the control of the supplier that can affect the level of slip-resistance of tiles, or contribute to the incidents of injury through slipping. Consequently, the laboratory test results presented here must not be viewed to mean that GNS Ceramics Pty Ltd, is providing any warranty, nor will accept any liability for personal injury or accidents arising from the selection or installation of tiles under any circumstances.

Classes of Use

The classification has taken into account the recommendations of the Australian Standards; however, they are given for general guidance only. They are valid for the given application under **NORMAL CONDITIONS** and should not be taken to provide accurate product specifications for specific requirements.

WARNING: Other standards and building code requirements may affect your selection of tiles.

Consideration should be given to the footwear, type of pedestrian traffic and cleaning methods expected. Floors should be adequately protected against soiling from following trades during installation; they should also be protected against scratching dirt at the entrances to building by interposing footwear cleaning devices. For example, mats, shoe scrapers, static devices, etc.


CLASS 4 - Floor coverings that are walked on by regular traffic with some scratching dirt so that conditions are more severe than CLASS 3; For example, entrances, laundries with external access, living areas, entertainment areas, patio's, sales rooms, motels.

PADUA
REDEFINE
PERFECTION

CRETE TECHNICAL SPECIFICATIONS

600mmx600mm

TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	PRESCRIBED VALUES	PADUA VALUES
MEASUREMENT & SURFACE APPEARANCE			
LENGTH	EN ISO10545-2	±0.6%	-0.05% ~ -0.03%
WIDTH		±2.0mm	-0.3mm～-0.2mm
THICKNESS	EN ISO10545-2	±5%	-0.4% ~ +0.9%
STRAIGHTNESS OF SIDES	EN ISO10545-2	±0.5%	-0.02% ~ +0.01%
RECTANGULARITY	EN ISO10545-2	±0.5%	-0.06% ~ -0.05%
SURFACE FLATNESS	EN ISO10545-2	±0.5%	+0.04% ~ +0.05%
		±2.0mm	+0.4mm
PHYSICAL PROPERTIES			
WATER ABSORPTION	EN ISO 10543-3	E_v≤0.5%	≤0.05%
BREAKING STRENGTH	EN ISO 10545-4	≥1300	2220
MODULUS OF RUPTURE	EN ISO 10545-4	≥35N/mm^2	50.0
CHEMICAL PROPERTIES			
RESISTANCE TO STAINING	AS 4459.14-1999	MINIMUM CLASS 3	CLASS 5
RESISTANCE TO CHEMICALS	EN ISO 10545-13	MINIMUM GB	GA
SLIP RESISTANCE			
WET PENDULUM TEST, SLIDER 96	AS 4586 -2013/Amdt 1-2017 Appendix A	-	SRV:51 CLASS: P4

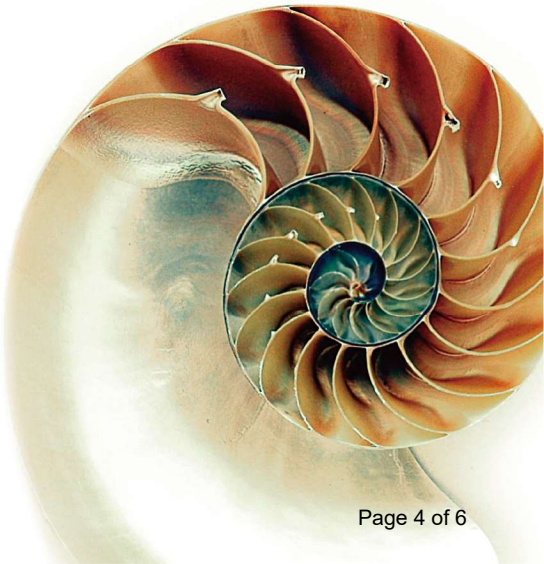


FOSHAN PADUA CERAMICS CO.,LTD
11TH FLOOR.BLDG T13,SMART CITY,NO.1.ZHIHUI RD.,
CHANCHENG FOSHAN,GUANGDONG,CHINA.
+86 757 8256 5826
www.paduaceramics.com

PADUA
REDEFINE
PERFECTION

CRETE TECHNICAL SPECIFICATIONS

600mmx1200mm

TECHNICAL CHARACTERISTIC	STANDARD TEST METHOD	PRESCRIBED VALUES	PADUA VALUES
MEASUREMENT & SURFACE APPEARANCE			
LENGTH	EN ISO10545-2	±0.6%	-0.05% ~ -0.03%
WIDTH		±2.0mm	-0.3mm～-0.2mm
THICKNESS	EN ISO10545-2	±5%	0 ~ +0.9%
STRAIGHTNESS OF SIDES	EN ISO10545-2	±0.5%	-0.02% ~ +0.01%
RECTANGULARITY	EN ISO10545-2	±0.5%	-0.06% ~ -0.05%
SURFACE FLATNESS	EN ISO10545-2	±0.5%	+0.04% ~ +0.05%
		±2.0mm	+0.4mm
PHYSICAL PROPERTIES			
WATER ABSORPTION	EN ISO 10543-3	E_v≤0.5%	≤0.07%
BREAKING STRENGTH	EN ISO 10545-4	≥1300	2297
MODULUS OF RUPTURE	EN ISO 10545-4	≥35N/mm^2	35.0
CHEMICAL PROPERTIES			
RESISTANCE TO STAINING	AS 4459.14-1999	MINIMUM CLASS 3	CLASS 5
RESISTANCE TO CHEMICALS	EN ISO 10545-13	MINIMUM GB	GA
SLIP RESISTANCE			
WET PENDULUM TEST, SLIDER 96	AS 4586 -2013/Amdt 1-2017 Appendix A	-	SRV:57 CLASS: P5

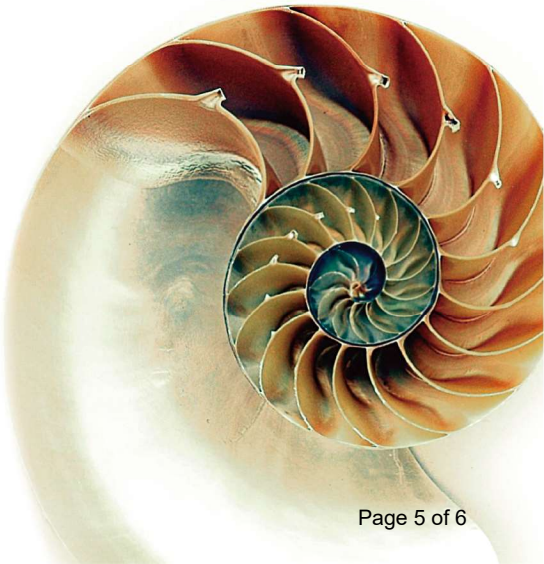

FOSHAN PADUA CERAMICS CO.,LTD
11TH FLOOR.BLDG T13,SMART CITY,NO.1.ZHIHUI RD.,
CHANCHENG FOSHAN,GUANGDONG,CHINA.
+86 757 8256 5826
www.paduaceramics.com

CERAMIC TEST LAB

NATA Accreditation No: 20807

Slip Test Report S220002

Issue Date: 27/07/2022

Requested by:	GNS Ceramics
Address:	3 Cox Place Glendenning
Sample number:	699972
Sample name:	Crete
Sample description:	C6171 CRETE BIANCO WHITE MATT 600X600, Light grey concrete print, lightly textured, 600x600 tile cut down to ~300x300x9mm

Test Date	26/07/2022	**Temperature (Laboratory)**	22.2°C

Pendulum Friction Tester:	Munro Stanley Portable Skid Resistance Tester S/N: 2081 Calibration Date: 2 November 2021

Test Specimen (Unfixed)	**Pendulum Swing Results (BPN)**					**Mean (BPN) (**last 3 swings)	**Classification According to AS4586-2013**	
	1	**2**	**3**	**4**	**5**			
Tile 1	48	48	47	47	47	47	**P4**	
Tile 2	49	49	49	48	48	48		
Tile 3	47	48	48	48	47	48		
Tile 4	50	50	51	50	50	50	**SRV (BPN)**	48
Tile 5	50	49	49	49	49	49		

All samples were tested unfixed on a flat and level surface, no slope correction required.
Each tile cleaned with water and light scrubbing prior to testing.
SRV= Slip Resistance Value

Testing performed in Accordance with AS4586-2013 Amd 1:2017, Appendix A Wet Pendulum Test Method with a 96 Rubber slider, conditioned with P400C paper dry, followed by 3 µm wet lapping film.

Test Location:	Ceramic Test Lab, 175 Racecourse Rd, Rutherford, NSW, 2320 Australia		
Test Officer	Luke Crisp	**Authorised by:**	Hong Lu

GREEN TAG CERT TM | GreenRate | Level A

GLOBAL GREEN TAG CERTIFIED

CERT TM

GreenRate | Level A

trust brands™

Foshan Padua Ceramics Co., Ltd

Room 1101, Building T13, Smart New City, Jihua 1st Road, Chancheng District, Guangdong, China

This is to Certify that the following Product/s have been found in conformance with the Global GreenTag CertTM Scheme Standard for the Tier and Level noted herein:

Porcelain Tiles

GreenRate Level A

Licenced Sites:
Fujian, China
Licence No.:
FMM:FJ01:2026:GR
Licence Date:
29 June 2026
Latest Revision Date:
29 June 2026
Valid to:
29 June 2027
GreenTag CERT TM Standard:
Standard Version 4.1

GLOBAL GREEN TAG
green product certification
trust brands
www.globalgreentag.com

David Baggs
Global GreenTag Cert TM Chief Executive Officer

GLOBAL GREEN TAG®

green product certification
trust brands

Conditions of Licence

The conditions of licence are contained in full in the Global GreenTag[CERT TM] Standard, Terms and Conditions, and Rules for the Use of the Mark Documents as sighted and/or executed by the Licensee.

In summary it is the responsibility of the licensee in particular to:

1. always comply with the relevant provisions of the GreenTag certification program;
2. make all necessary arrangements for the conduct of the future evaluation, including provision for examining documentation and access to all areas, records (including internal audit reports) and personnel for the purposes of evaluation (e.g. testing, inspection, assessment surveillance, reassessment) and resolution of complaints;
3. make claims regarding certification only in respect of the scope for which certification has been granted;
4. not use its product certification in such a manner as to bring the GreenTag into disrepute and not make any statement regarding its product certification which the certification body may consider misleading or unauthorized;
5. upon suspension or cancellation of certification, discontinue its use of all advertising matter that contains any reference thereto and returns any certification documents as required by GreenTag;
6. use certification only to indicate that products are certified as being in conformity with specified GreenTag standards;
7. endeavour to ensure that no certificate or report nor any part thereof is used in a misleading manner;
8. make comment or inclusions solely in accordance with license requirements in making reference to its product certification in communication media such as online, emails, documents, brochures or advertising;
9. Inform GreenTag of any change in the Certified product or manufacturing process that is likely to significantly affect the product's design or specification, or changes in the ownership, structure or management of the Licensee, if relevant, or any other information that indicates the product may no longer comply with the requirements of this Standard;
10. In the event of GreenTag determining changes have been made to product or supplier details and not notified to GreenTag, the Licensee will, on receipt of a GreenTag 'Notice to Rectify', immediately provide GreenTag with the required details and any fees necessary to allow recertification. Failure to do so may result in the withdrawal of the Licence. If the product Licence is withdrawn, the Licensee must, within 7 days, cease to further promulgate all product marketing, packaging, advertising or other material carrying the logo. Furthermore all material carrying the Certification Mark/s must be withdrawn within 90 days.

Revision Date	Certificate Number	Notes
29 June 2026	FMM:FJ01:2026:GR	Product certified to GreenTag Standard v4.1