
MIDAS
Timeless
Luxury in
Every Detail



Midas — transform your space with the modern Midas touch ✨

Midas is named in tribute to the legendary King Midas — whose touch turned everything to gold. Like its namesake, the Midas collection is designed to transform spaces with effortless elegance, elevating everyday surfaces into refined expressions of style.

Inspired by the veined beauty of natural marble, Midas blends soft movement and tonal depth with the durability of glazed porcelain. Offered in a serene palette of White, Grey, and Beige, it’s crafted to complement both contemporary and classic interiors.

- Rectified 30x60 and 60x60: Precision-cut edges enable sleek, minimal grout lines, while a subtle gloss finish accentuates the veining, bringing out the full depth and beauty of the stone-like design — perfect for high-end floors and feature walls.

- Pressed edge 30x30 and 45x45: A more accessible option that maintains the Midus aesthetic while offering greater value — ideal for everyday builds and renovations.

Proudly Australian made, Midas delivers timeless style with lasting performance. 🦘



Midas

GNS CERAMICS
EXCLUSIVELY WHOLESALE


Beige



Grey



White

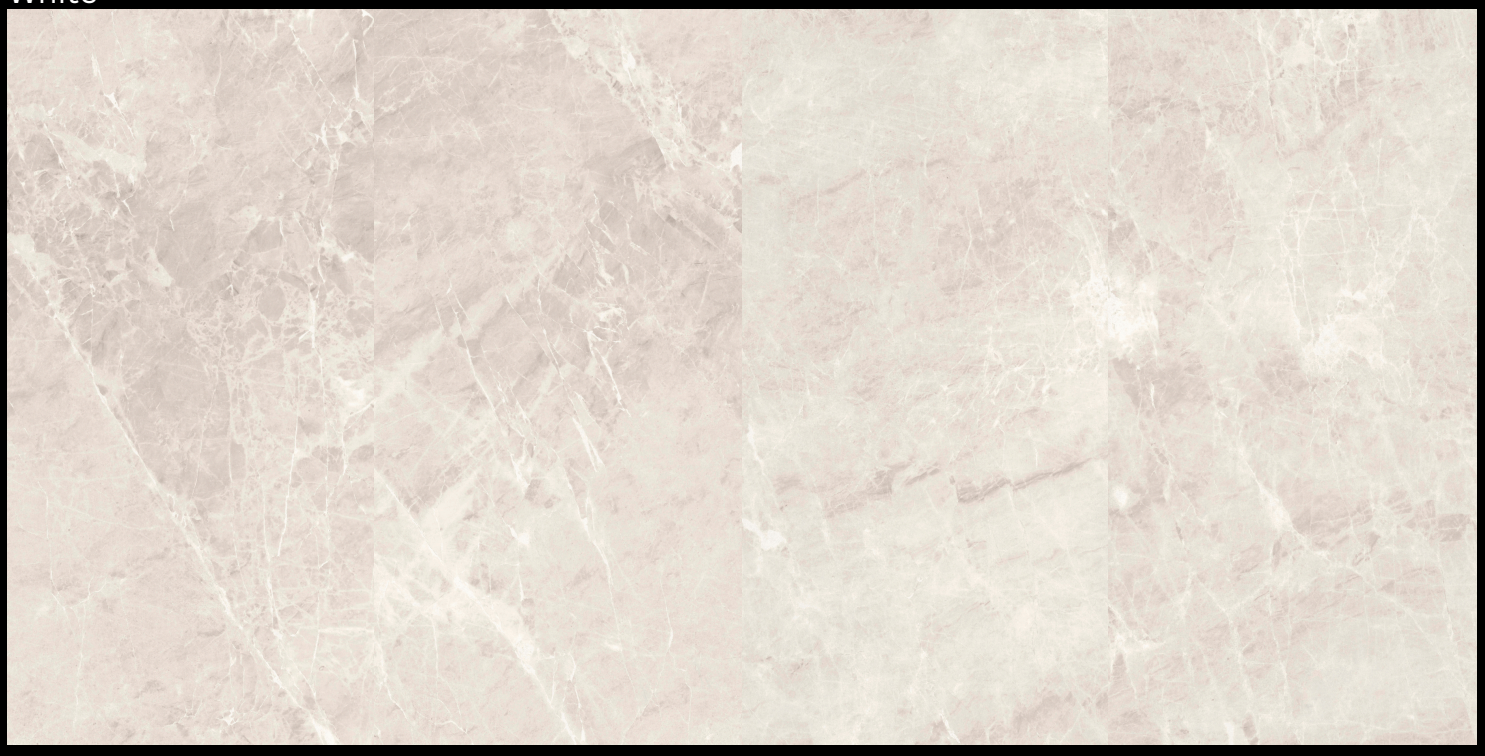

300x300mm
Matt P3

450x450mm
Matt P3
Exernal P5

Pressed

Rectified

300x600mm
Matt P3

600x600mm
Matt P3
External P5

Floor Cat. 4

V2
Variation

Glazed
Porcelain

12
600x600mm

Australian Made

P3
300x300, 300x600
450x450, 600x600

P5
450x450mm
600x600mm

GNS Ceramics recommends that our retail shops pass on the following information to the installer and end-user.

Click or Scan for Installation Instructions


Ceramic tiles are only one component of a much larger building system. It is our experience that failure of any tiling system is very often the result of a combination of factors. For example; inappropriate design, type of substrate, surface preparation, temperature during installation, adhesives, incompatibility of products, product failure, environmental factors skill and knowledge of the installers etc; the latter being supplied or controlled by a variety of manufacturers and tradesmen. GNS Ceramics has no involvement in the design, selling and installation processes and once goods have been dispatched from our warehouse we have no control over where and how these products are used. As a result the project manager, and or the tiler are the only people in a position to ensure that all the components used in a project are compatible and that the product is installed in accordance with the Australian Building Code and the Australian Standards.

Installation Instructions for all types of tiles can be found in the GNS Ceramics Price List, and on our website. We suggest these are followed at all times.

Cleaning and Maintenance

Do not use abrasive cleaners and chemicals which could permanently scratch and damage the surface of the tile. For daily cleaning we recommend the use of a mild PH Neutral detergent. Should a more vigorous cleaning programme be required we recommend the use of a proprietary tile cleaner from a specialty tile supplier.

Colour & Pattern Variation Guide



Uniform Appearance | Slight Variation | Moderate Variation | High Variation

Slip Resistance

The best way to minimise the risk of slipping is through safe design principals. This involves a risk management approach which evaluates the likelihood and consequence of an incident to occur. Slip resistive flooring is only one of the design components to consider, other design features should also be considered, including awnings, airlocks, matting and a suitable cleaning regime to reduce the extent of contaminates. Visual aids, warning signs, handrails and lighting, along with the footwear to be worn, should also be considered.

All ceramic tiles can be slippery, particularly when wet. This includes tiles, commonly used in wet areas such as bathrooms. It is important that customers be aware of the potential danger of wet ceramic tiles and seek advice from the retailer as to the level of slip-resistance of any particular tile, and its suitability for the intended application. If there is any doubt, tiles should be tested for slip-resistance immediately after being laid, under the conditions that they will be subject to during use. While tiles may achieve an acceptable standard in a laboratory test, it is quite probable that the performance in-situ will be less than expected, due to installation methods, wear & tear, cleaning regimes and unforeseen circumstances. Test results should therefore to be seen as a relative guide to estimate the merits of one tile versus another and should be used in conjunction with the Australian Building Code and the relevant Australian Standards. Further information on slip resistance is provided in the Australian Standards HB198:2014 - An Introductory guide to the slip resistance of pedestrian surface materials.

There are many factors beyond the control of the supplier that can affect the level of slip-resistance of tiles, or contribute to the incidents of injury through slipping. Consequently, the laboratory test results presented here must not be viewed to mean that GNS Ceramics Pty Ltd, is providing any warranty, nor will accept any liability for personal injury or accidents arising from the selection or installation of tiles under any circumstances.

Classes of Use

The classification has taken into account the recommendations of the Australian Standards; however, they are given for general guidance only. They are valid for the given application under **NORMAL CONDITIONS** and should not be taken to provide accurate product specifications for specific requirements.

WARNING: Other standards and building code requirements may affect your selection of tiles.

Consideration should be given to the footwear, type of pedestrian traffic and cleaning methods expected. Floors should be adequately protected against soiling from following trades during installation; they should also be protected against scratching dirt at the entrances to building by interposing footwear cleaning devices. For example, mats, shoe scrapers, static devices, etc.

CLASS 4 - Floor coverings that are walked on by regular traffic with some scratching dirt so that conditions are more severe than CLASS 3; For example, entrances, laundries with external access, living areas, entertainment areas, patio's, sales rooms, motels.

www.ncia.com.au
Australian Made Tiles

175 Racecourse Rd, Rutherford NSW 2320
PO Box 765 Maitland NSW 2320
Australia
Tel: 02 4931 8400 Fax: 02 4931 8499

ABN 83 100 467 267

NCIA Specification Sheet

Midas Range

Product Code	Description	Nominal Size (mm)	Nominal Thickness (mm)	Pendulum (slip) Rating	PEI Rating
RMD61055A	Midas White P3 RECT GRD-A	300*600	8.5mm	P3	4
RMD62055A	Midas Grey P3 RECT GRD-A	300*600	8.5mm	P3	4
RMD63155A	Midas Beige P3 RECT GRD-A	300*600	8.5mm	P3	4
RMD61060A	Midas White P3 RECT GRD-A	600*600	9.0mm	P3	4
RMD1560A	Midas White P5 RECT GRD-A	600*600	9.0mm	P5	4
RMD62060A	Midas Grey P3 RECT GRD-A	600*600	9.0mm	P3	4
RMD2560A	Midas Grey P5 RECT GRD-A	600*600	9.0mm	P5	4
RMD63160A	Midas Beige P3 RECT GRD-A	600*600	9.0mm	P3	4
RMD3660A	Midas Beige P5 RECT GRD-A	600*600	9.0mm	P5	4
XMD61045A	Midas White P3 RECT GRD-A	450*450	7.5mm	P3	4
XMD1545A	Midas White P5 RECT GRD-A	450*450	7.5mm	P5	4
XMD62045A	Midas Grey P3 RECT GRD-A	450*450	7.5mm	P3	4
ZMD2545A	Midas Grey P5 RECT GRD-A	450*450	7.5mm	P5	4
XMD62045A	Midas Beige P3 RECT GRD-A	450*450	7.5mm	P3	4
XMD3645A	Midas Beige P5 RECT GRD-A	450*450	7.5mm	P5	4
XMD61022A	Midas White P3 RECT GRD-A	300*300	6.3mm	P3	4
XMD62022A	Midas Grey P3 RECT GRD-A	300*300	6.3mm	P3	4
XMD63122A	Midas Beige P3 RECT GRD-A	300*300	6.3mm	P3	4

Product Specific Information

Screen Size	2640*1320mm
Variation Rating	V2 – Slight Variation (similar colour tones)
Print Mode: 300*300mm	Tiling 32 Unique Faces
Print Mode – 450*450mm	Tiling 8 Unique Faces
Print Mode – 300*600mm	Tiling 16 Unique Faces
Print Mode: 600*600mm	Tiling 8 Unique Faces

National Ceramic Industries Australia Pty Ltd
175 Racecourse Rd, Rutherford NSW 2320
PO Box 765 Maitland NSW 2320
Australia
www.ncia.com.au
ABN 83 100 467 267

NCIA Specification Sheet

NCIA products conform to Annex H Group $B1_b$. NCIA tiles meet and exceed requirements under International/Australian Standards AU ISO 13006-2020.

NCIA tiles are classified as a low water absorption vitrified tile under Australian Standards.

Category	NCIA Standards	AU ISO 13006-2020 Annex H Group $B1_b$
Length and Width	+- 0.5mm (difference from work size)	Difference from work size +-2.0mm (pressed edge) +-1.0mm (rectified edge)
Thickness	+- 0.5mm (difference from work size)	+- 0.5mm (difference from work size)
Centre Curvature	+- 1.0mm	+-2.0mm (pressed edge) +-1.8mm (rectified edge)
Straightness of Side	+- 0.8mm	+-1.5mm (pressed edge) +-0.8mm (rectified edge)
Edge Curvature	+- 1.0mm	+-2.0mm (pressed edge) +-1.8mm (rectified edge)
Warpage - diagonal	+- 1.0mm	+-2.0mm (pressed edge) +-1.8mm (rectified edge)
Rectangularity	+- 0.5mm	+-2.0mm (pressed edge) +-1.5mm (rectified edge)
Resistance to Surface Abrasion	Minimum PEI 3 (750 or 1500 cycles passed)	Report abrasion class and cycles passed
Stain Resistance	Minimum Class 4	Minimum Class 3
Resistance to Chemicals		
Resistance to low concentrations of acids and alkalis	Class A	Manufacturer to state classification
Resistance to high concentrations of acids and alkalis	Class A	Test method available
Resistance to household chemicals and swimming pool salts	Class A	Minimum B
Water Absorption	0.5-3%	0.5-3%
Resistance to Crazing	No Crazing	Required
Resistance to Frost	Resistant	Required
Moisture Expansion	Less than 0.01%	Test method available
Modulus of Rupture (N/mm2)	Minimum 30N/mm^2	Minimum 30N/mm^2. Individual minimum 27N/mm^2
Surface Quality	Minimum 98% Defect Free	Minimum 95% defect free
Impact Resistance	Coefficient of Restitution 0.93	Test method available (light duty 0.55)
Resistance to Fire	Non-Flammable	No requirement
Gaseous Emissions when Exposed to Fire	No Emission	No requirement
VOC Emissions	No Emission	No requirement
Fading in UV/Sunlight	Color Permanence	No requirement
Resistance to Scratch	Minimum MOHS 6.5	No requirement

Work Size	Nominal Thickness
300*300	6.3mm
450*450	7.5mm
500*500	8mm
300*600	8.5mm
600*600	9mm

Work Size	M2 per pallet	Boxes per pallet	M2 per box	Pieces per box	Pallet weight kgs
300*300	95.04	48	1.98	22	1207
450*450	113.6	80	1.42	7	1800
500*500	72	48	1.50	6	1224
300*600	69.12	48	1.44	8	1248
600*600	69.12	48	1.44	4	1290

Chemical Composition (Average)	%
Na_2O	2.76
K_2O	3.95
MgO	0.69
CaO	0.58
Mn_3O_4	0.08
Al_2O_3	18.30
Fe_2O_3	1.40
SiO_2	70.00
- (Crystalline Silica)	- (15-25%)
TiO_2	0.66
P_2O_5	0.06
SO_3	<0.01
LOI	<1.70

Product Warranty	Term
Domestic Use	10 years
Commercial Use	7 years

Other	Reference
Operating in NSW under Environment Protection License	11956
MSDS	www.ncia.com.au
Cleaning/maintenance recommendation	www.ncia.com.au
Contact	sales@ncia.com.au
Raw materials	Sourced from NSW & Victoria
Employment	60 staff
Current Production Capacity	6million m2 per annum
Australian Made License	8934
Member of the Australian Tile Council	