Washup




Neutral colours don't have to be boring, this affordable range uses subtle movement to bring life to a neutral colour pallette. Perfect for those looking for a modern or urban décor.







- **Colours** Beige, Charcoal, Grey & White
- **Sizes** 300x300 Matt floors
  450x450 Lappato, Matt & External floors
  300x400 Gloss walls







External finish










GNS Ceramics recommends that our retail shops pass on the following information to the installer and end-user.


Ceramic tiles are only one component of a much larger building system. It is our experience that failure of any tiling system is very often the result of a combination of factors. For example; inappropriate design, type of substrate, surface preparation, temperature during installation, adhesives, incompatibility of products, product failure, environmental factors skill and knowledge of the installers etc; the latter being supplied or controlled by a variety of manufacturers and tradesmen. GNS Ceramics has no involvement in the design, selling and installation processes and once goods have been dispatched from our warehouse we have no control over where and how these products are used. As a result the project manager, and or the tiler are the only people in a position to ensure that all the components used in a project are compatible and that the product is installed in accordance with the Australian Building Code and the Australian Standards.

Installation Instructions for all types of tiles can be found in the GNS Ceramics Price List, and on our website. We suggest these are followed at all times.

Cleaning and Maintenance

Do not use abrasive cleaners and chemicals which could permanently scratch and damage the surface of the tile. For daily cleaning we recommend the use of a mild PH Neutral detergent. Should a more vigorous cleaning programme be required we recommend the use of a proprietary tile cleaner from a specialty tile supplier.

Colour & Pattern Variation Guide

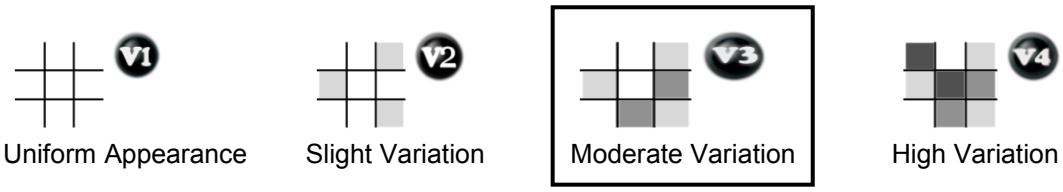

Uniform Appearance | Slight Variation | Moderate Variation | High Variation

Slip Resistance

The best way to minimise the risk of slipping is through safe design principals. This involves a risk management approach which evaluates the likelihood and consequence of an incident to occur. Slip resistive flooring is only one of the design components to consider, other design features should also be considered, including awnings, airlocks, matting and a suitable cleaning regime to reduce the extent of contaminates. Visual aids, warning signs, handrails and lighting, along with the footwear to be worn, should also be considered.

All ceramic tiles can be slippery, particularly when wet. This includes tiles, commonly used in wet areas such as bathrooms. It is important that customers be aware of the potential danger of wet ceramic tiles and seek advice from the retailer as to the level of slip-resistance of any particular tile, and its suitability for the intended application. If there is any doubt, tiles should be tested for slip-resistance immediately after being laid, under the conditions that they will be subject to during use. While tiles may achieve an acceptable standard in a laboratory test, it is quite probable that the performance in-situ will be less than expected, due to installation methods, wear & tear, cleaning regimes and unforeseen circumstances. Test results should therefore to be seen as a relative guide to estimate the merits of one tile versus another and should be used in conjunction with the Australian Building Code and the relevant Australian Standards. Further information on slip resistance is provided in the Australian Standards HB197:1999 and HB198:2014 - An Introductory guide to the slip resistance of pedestrian surface materials.

There are many factors beyond the control of the supplier that can affect the level of slip-resistance of tiles, or contribute to the incidents of injury through slipping. Consequently, the laboratory test results presented here must not be viewed to mean that GNS Ceramics Pty Ltd, is providing any warranty, nor will accept any liability for personal injury or accidents arising from the selection or installation of tiles under any circumstances.

Classes of Use

The classification has taken into account the recommendations of the Australian Standards; however, they are given for general guidance only. They are valid for the given application under **NORMAL CONDITIONS** and should not be taken to provide accurate product specifications for specific requirements.

WARNING: Other standards and building code requirements may affect your selection of tiles.

Consideration should be given to the footwear, type of pedestrian traffic and cleaning methods expected. Floors should be adequately protected against soiling from following trades during installation; they should also be protected against scratching dirt at the entrances to building by interposing footwear cleaning devices. For example, mats, shoe scrapers, static devices, etc.

CLASS 0 - Tiles in this class are not recommended for use on floors.

CLASS 4 - Floor coverings that are walked on by regular traffic with some scratching dirt so that conditions are more severe than CLASS 3; For example, entrances, laundries with external access, living areas, entertainment areas, patio's, sales rooms, motels.

Slip Check to AS 4586:2013

WP4501R - Washup White External 450x450

NATA Accreditation Number 17139

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards

Accredited for compliance with ISO/IEC 17025

NATA is a signatory to the APLAC mutual recognition arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports

This test report shall not be reproduced unless in full, without written approval of Safe Environments Pty Ltd

Safe Environments Pty Ltd
Unit 4, 40 Bessemer Street, Blacktown NSW 2148 Australia
T (+61) (2) 9621 3706 F (+61) (2) 9621 8891

ABN 80 118 534 768
www.SafeEnvironments.com.au
info@safeenvironments.com.au

SlipCHECK
A division of Safe Environments Pty Ltd
www.SafeEnvironments.com.au

4/40 Bessemer Street
Blacktown NSW 2148
Phone 02 9621 3706
ABN 80 118 534 768

17 March 2016

Test Report No. R10518

Slip Resistance Classification of New Pedestrian Surface Materials

AS 4586:2013 Appendix A (Wet Pendulum Test)

The slip resistance Classification has been determined for unused surfaces using specific conditions. Factors such as usage, cleaning systems, applied coatings and patterns of wear may affect the characteristics of the surface.

Requested by:	Max Glory c/- GNS Ceramics
Client Address:	3 Cox Place Glendenning NSW 2761
Product Manufacturer:	Max Glory
Product Description:	WP4501R - Washup White External 450x450
Test conducted according to:	AS 4586:2013 Appendix A
Location:	Slip Check Pty Ltd Test Facilities, Blacktown NSW 2148
Conducted by:	Dale Rowell

Date:	16 March 2016	Temperature:	27°C
Sample:	Unfixed	Cleaning:	None
Rubber slider used:	Slider 96	Conditioned:	Grade P 400 paper dry followed by wet lapping film
Slope of specimen:	Tested on a flat level surface		
Direction of Test:	NA		

	Specimen 1	Specimen 2	Specimen 3	Specimen 4	Specimen 5
Mean BPN of last 3 swings:	68	69	67	60	67

Reported SRV of Sample:	**66**
Class:	**P5**

NATA ACCREDITED FOR TECHNICAL COMPETENCE

Ryan Voorderhake
Technician

This test report shall not be reproduced unless in full, without written approval of Safe Environments Pty Ltd